

HUB-40 SD FLOW SENSOR

Ideal for any industry or flow measurement application where a non-hazardous sensor is required, such as in hydraulic systems.



FEATURES

- Square wave output signal has a duty cycle of approximately 50%.
- For use with most meter sizes of the following AW-Lake flow meters:
 - JVM-xxx gear meters
 - JVS-xxx gear meters
 - JVHS-xxx gear meters
 - ZHM-xxx gear meters
 - HPM-xxx turbine meters
 - HM-xxx turbine meters
 - TRG-xxx turbine meters
 - SRZ-xxx gear meters

TECHNICAL SPECIFICATIONS

Supply Voltage
10-24 VDC

Supply Current

- 8 mA @ 12 VDC
- 12 mA @ 24 VDC

Sensor/Monitor Frequency Output
Flow dependent, 0.5 Hz minimum

Output Amplitude

- $V_{HIGH} = V_{SUPPLY} - 0.7$ Volts
- $V_{LOW} = 0$ Volts

Duty Signal
50% \pm 15%

Connections Available

- 3 pin connector
- Flying leads
- Junction box with terminal block
- JST Connector

Temperature Ratings

- -20 to 85°C (-4 to 140°F)

BENEFITS

Up and Running in Minutes

Easy thread-in installation. A quick setup procedure allows you to have the sensor working with just a few simple installation steps.

Flexible Mounting

Because of the integral swivel union, the HUB-40 unit can be rotated 360° for easy wiring. Options available to fit any AW Gear Meter or Turbine Meter.

Weather-Proof Enclosure

Optional NEMA 4X enclosure provides environmental protection from moisture and debris.

Built-In Protection



The signal outputs are protected by a self-resetting fuse with a 50 mA nominal trip point.

HUB-40 SD FLOW SENSOR


Ideal for any industry or flow measurement application where a non-hazardous sensor is required, such as in hydraulic systems.

HUB-40 DIMENSIONS

Limatherm Junction Box

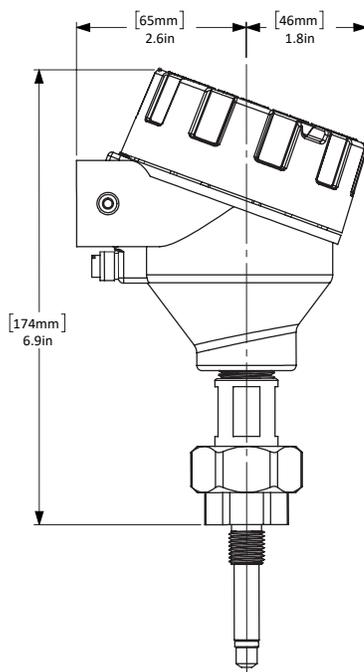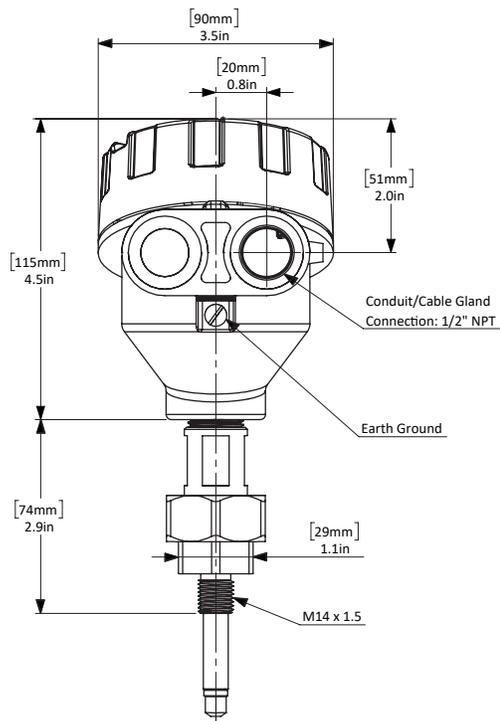

No Junction Box

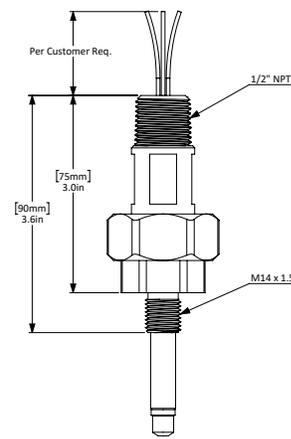

PART NUMBER:

HUB-40 SD - S -

Junction box options
1 = No junction box**
2 = Limatherm Junction Box

Housing Material
S = 316ss

Sensor type
G = Hall sensor (sinking version)
H = Hall sensor (sourcing version)
*Carrier & Inductive sensor available.
Contact factory.*

Meter side thread type
5 = M14 connection

Termination
1 = Terminal block (only choice for Limatherm junction box version)
2 = Flying leads - 8 inches standard
3 = Leads w/ JST male connector
4 = 3 pin connector

End-of-Life Disposal:

At the end of its service life, this product and its associated electronics should **not be discarded with municipal solid waste**. We strongly recommend recycling the unit in accordance with **all applicable local, state, and federal regulations**. Electronic components may qualify as universal waste and should be handled through an appropriate recycling or collection program. Responsible recycling supports our commitment to environmental stewardship under **ISO 14001**.

Products may be subject to change without notice - Contact factory for the most up-to-date product information.